


Bus Unit (Crimp Snap-in Connections)**(6ES5 700-8MA22)****Technical specifications**

Type of connection	Crimp snap-in
Number of plug-in modules	2
Number of bus units per programmable controller	max. 16
Connection between two bus units	flat ribbon
Number of terminals	10 per slot
Conductor cross sectional area - stranded	0.5 to 1.5 mm ²
Insulation rating	VDE 0160
Rated insulation voltage (+9 V to $\perp$)	12 V AC
- insulation group	1xB
- tested with	500 V AC
Current consumption - from +9 V (CPU)	typ. 1 mA
Dimensions W×H×D in mm	91.5×135×39
in.	3.6×5.3×1.5
Weight	approx. 250 g (8.8 oz.)

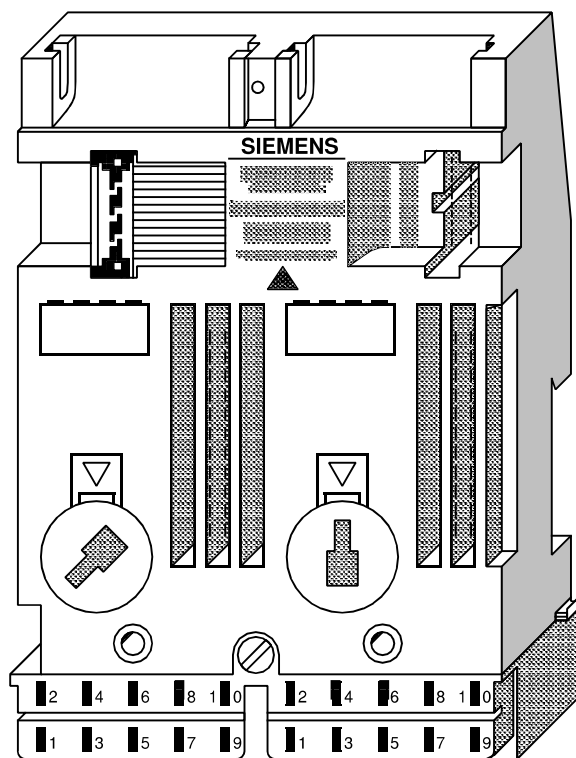